

QL52A

15x10m

High Load roof systems are particularly suitable for medium-sized covered structures. They consist in load bearing trusses with universal fork connections for high-end solutions.

Dimensions	15x10 m
Heights range*	from 7 to 11 m
Main truss	QL52A
Towers	4 x Maxitower 40
Uniformly distributed load UDL **	7000 kg ≈
Chain hoists	1000 kg
Total weight	6700 kg
Volume	45 m ³
Set-up time & number of workers	4 hrs / 5 w

* Range suggested according to the dimensions of the roof system.


** Indicative loading data for use in environments without wind. For details and further information, please consult the technical specifications or contact our engineering department or distributors.

For details and further information, please consult the technical specifications or contact our engineering department or distributors.

The examples and data shown on these pages are necessarily indicative owing to the extreme variability of the conditions in which the structures may be assembled. Each installation must be provided with a suitable quantity of ballast, as shown on the product certificates.

This line of structures was created in compliance with European standards.

Use of these systems is governed by laws which vary according to the country they are assembled in. They must be put together in compliance with the local regulations in force.

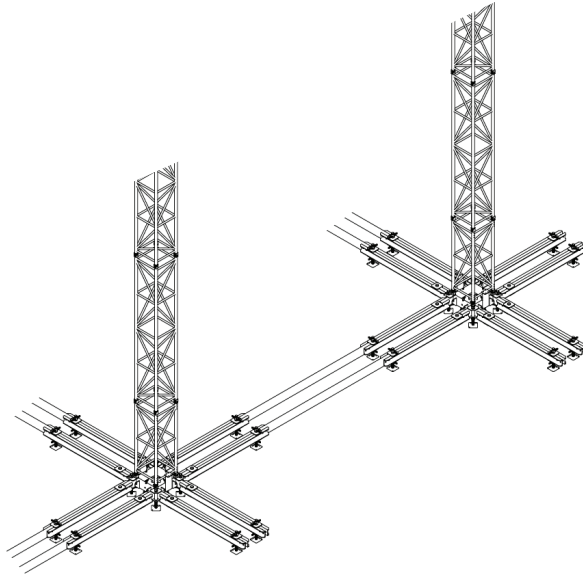

QL52A 15x10m

Side extensions for suspensions outside the set may be added to the front.

