



LIBERA TUNNEL

22x19m

Not just straight: LIBERA can be “bent” and used to create rounded components simply by adding small accessories to normal trusses. With simple stratagems you can go from flat systems to arched systems and vice versa. Tunnels may be created with front or side roof ridges.

Dimensions	22x19 m
Heights range*	from 8 to 14 m
Main truss	LIBERA FL76
Towers	6 x Maxitower 52
Uniformly distributed load UDL **	13000 kg ≈
Chain hoists	2000 kg
Total weight	9700 kg
Volume	62 m ³
Set-up time & number of workers	8 hrs / 8 w

* Range suggested according to the dimensions of the roof system.


** Indicative loading data for use in environments without wind. For details and further information, please consult the technical specifications or contact our engineering department or distributors.

For details and further information, please consult the technical specifications or contact our engineering department or distributors.

The examples and data shown on these pages are necessarily indicative owing to the extreme variability of the conditions in which the structures may be assembled. Each installation must be provided with a suitable quantity of ballast, as shown on the product certificates.

This line of structures was created in compliance with European standards.

Use of these systems is governed by laws which vary according to the country they are assembled in. They must be put together in compliance with the local regulations in force.

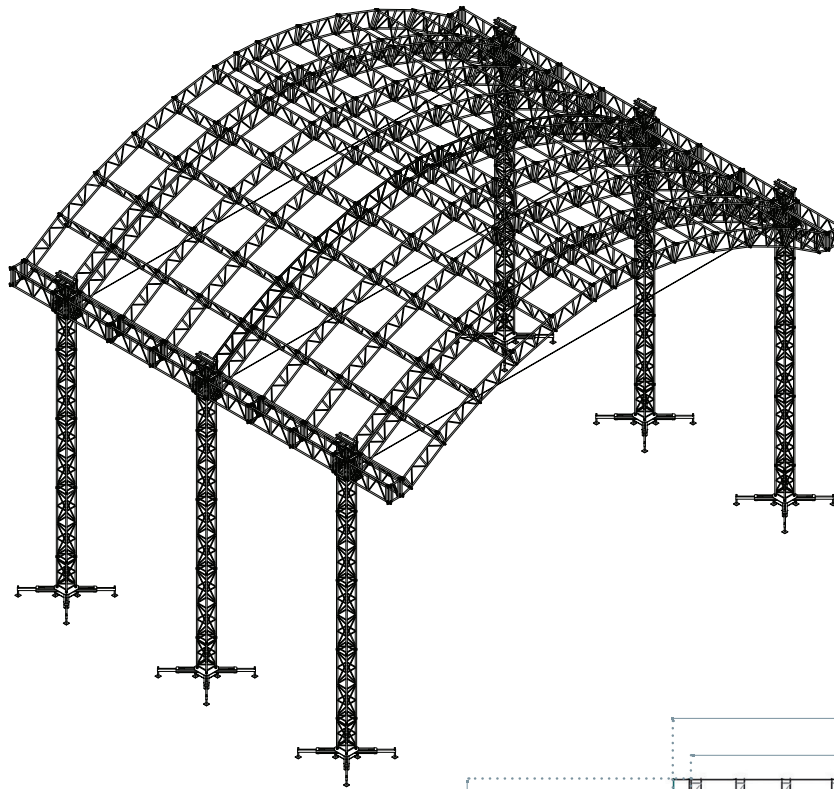

LIBERA TUNNEL 22x19m

No other product in this sector is so versatile, and riggers who fully understand the concept are able to assemble different structures each time. Rounded systems may be built with all LIBERA FL52, FL76 and FL105 models.

