



## TERRACE STAND ROOFING

This roof system for sports derives from the LIBERA modular concept. It uses trapezoidal flat section trusses which give the structure a streamlined look and the necessary slope for water to run off. Being completely overhanging, it does not need support pillars. The maximum overhang possible is 8 metres from the back wall, provided the stand structure is sufficiently ballasted.


### Dimensions

FL10075200R HL trapez. flat truss	100/75 cm section	2 metres long
FL7550200R HL trapez. flat truss	75/50 cm section	2 metres long
FL5035200R HL trapez. flat truss	50/35 cm section	2 metres long
FL3520200R HL trapez. flat truss	35/20 cm section	2 metres long

For details and further information, please consult the technical specifications or contact our engineering department or distributors.

The examples and data shown on these pages are necessarily indicative owing to the extreme variability of the conditions in which the structures may be assembled. Each installation must be provided with a suitable quantity of ballast, as shown on the product certificates.

This line of structures was created in compliance with European standards. Use of these systems is governed by laws which vary according to the country they are assembled in. They must be put together in compliance with the local regulations in force.

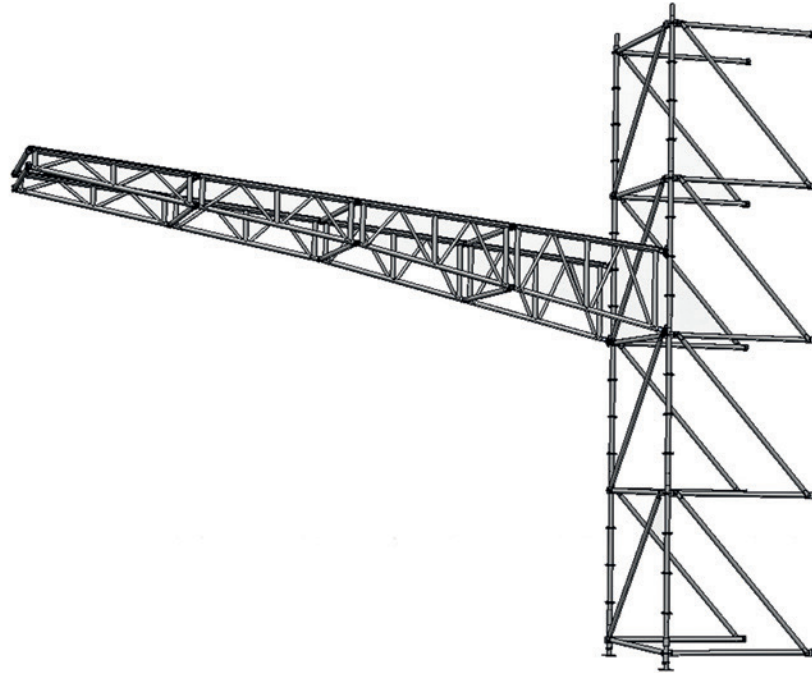

## TERRACE STAND ROOFING

LITEC only provides the roof system and connection components compatible with the most important makes of multidirectional scaffolding.

